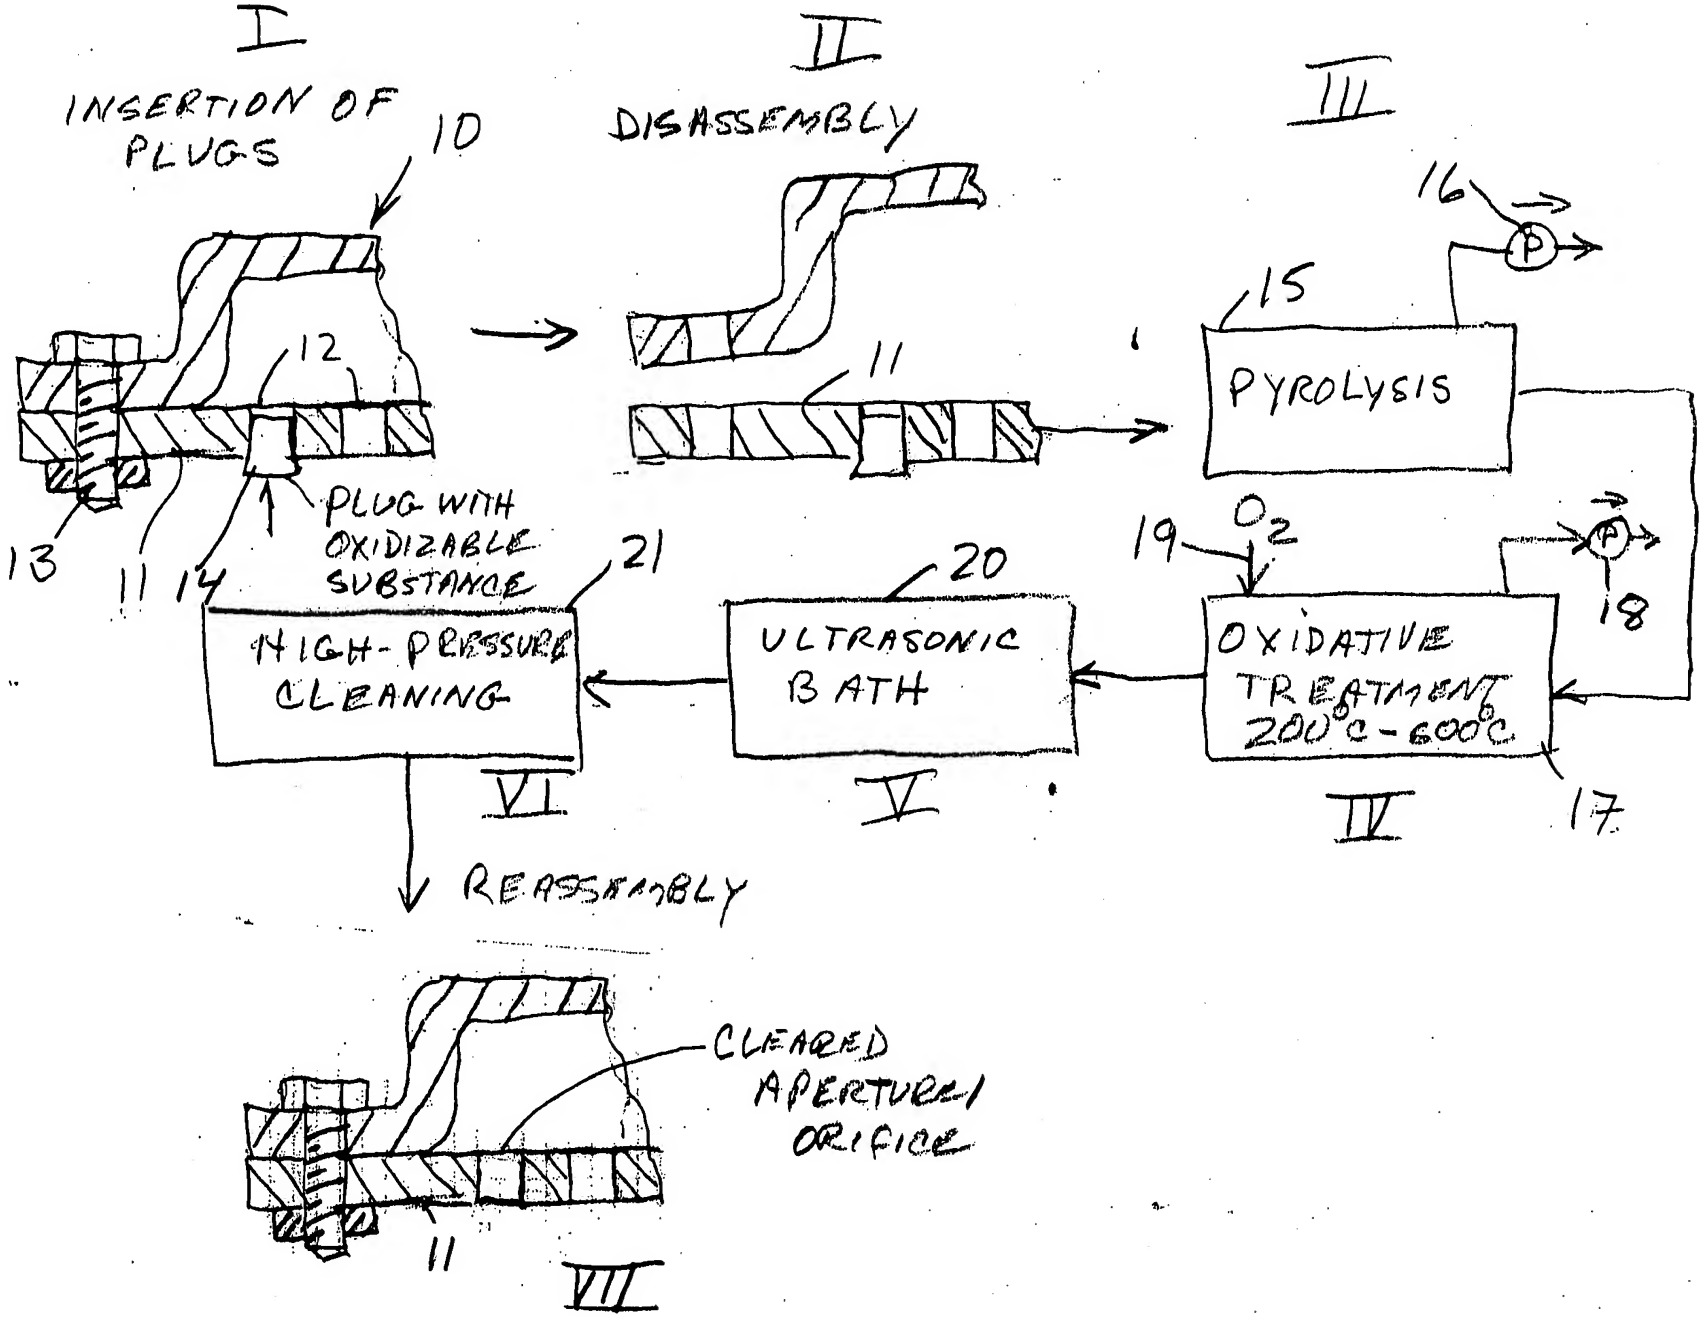
I
INSERTION OF PLUGS
10
12
13
11
14
PLUG WITH OXIDIZABLE SUBSTANCE
II
DISASSEMBLY
11
III
16
15
PYROLYSIS
19
O2
18
OXIDATIVE TREATMENT 200°C - 600°C
17
IV
20
ULTRASONIC BATH
V
21
HIGH-PRESSURE CLEANING
VI
REASSEMBLY
CLEARED APERTURE/ ORIFICE
11
VII